


MULTI MAT SYSTEM GUIDE




Manufactured to our premium pad specification our multi-mat system offers the perfect solution for large scale crane lifting. Excellent durability and rigidity reduces the overall pressure directed at the ground effectively supporting the equipment.


MULTI MAT SET-UP



Stage 1 - Three mats are laid side by side

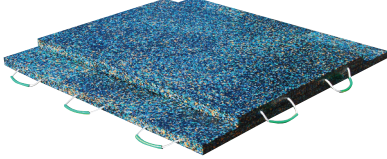

Stage 2 - Two mats are placed on top at 90 degrees

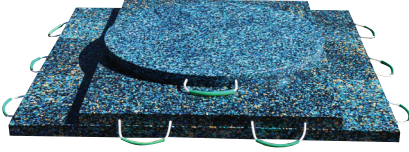

Stage 3 - A single outrigger pad is placed centrally on the top, securing the multi mat system

Please note: Ensure there are no gaps or debris present in the set-up. If in doubt refer to your lift plan.

Multi Mat Options

IP-57709
1500x500x50mm



IP-57710
1800x600x50mm



IP-57683
1000x60mm



IP-57685
1200x60mm




Our Multi Mat system recommends a round pad to secure, but a square pad is equally suitable.

| Dimensions (mm) | Load Capacity (tonnes) | Weight (kgs) | Product Code |
|---------------------|------------------------|--------------|--------------|
| 1500x500x50 | 100.00 | 36.00 | IP-57709 |
| 1800x600x50 | 140.00 | 54.00 | IP-57710 |
| 1000x60 (to secure) | 60.00 | 45.00 | IP-57683 |
| 1200x60 (to secure) | 90.00 | 66.40 | IP-57685 |


Configuration Options

1500x500x50mm




75 TONNES

1.50m² Configuration
Requires:
IP-57709 x 2
IP-57683



100 TONNES


2.25m² Configuration
Requires:
IP-57709 x 5
IP-57683



110 TONNES


3m² Configuration
Requires:
IP-57709 x 7
IP-57685

1800x600x50mm




100 TONNES

2.16m² Configuration
Requires:
IP-57710 x 2
IP-57685



140 TONNES

3.24m² Configuration
Requires:
IP-57710 x 5
IP-57685



160 TONNES

4.32m² Configuration
Requires:
IP-57710 x 7
IP-57685

Please note: Capacity based on complete Multi Mat system. These configurations are calculated for the max ground pressure of 5kgs/cm², for normal operational conditions.