ECO LIFT (IP-72000) OUTRIGGER PAD

These Eco Lift Pads provide strong and stable support to help with load distribution. They are perfect for use with small to medium sized equipment.

- **Engineered from High Density Polyethylene (HDPE)**
- **Tough and stable support for outrigger legs**
- **Resistant to water, oil and chemicals**
- **Lightweight and easy to handle**
- **Can be carried, positioned and stored with minimal effort**

SUITABLE FOR:

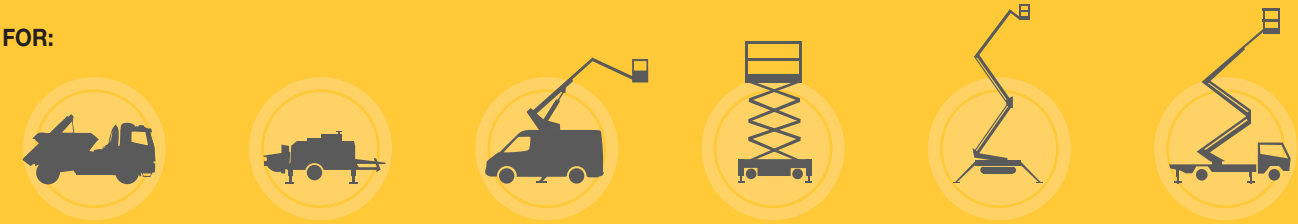

MATERIAL SPECIFICATION			
PROPERTIES	**UNIT**	**TEST METHOD**	**ISO-LEN 500**
Density	g/cm3	ISO1183-1	0.95-0.98
YieldMPa	ASTM D-638	25	
Ultimate strength	MPa	ASTM D-638	45
Tensile strength	Psi	ASTM D-638	5900
Tensile modulus of elasticity	Psi	ASTM D-638	116500
Breaking elongation	%	ISO527	>50
Impact strength	MJ/mm2	ISO179	No breaking
Shore hardness	Shore D	ISO868	64-67
Abrasion	Steel=100	ISO15527	83
Melting Point	°C	ASTM D-3417	138
Coefficient of thermal expansion	°C	ASTM D-696	0.0002
Friction coefficient (Static state)	Unit less	ASTM D-1894	0.11

The data mentioned in this brochure are average values ascertained by current statistical returns and tests, but we cannot accept any responsibility for their accuracy.

Product Code: **IP-72000**

Dimensions (mm): **400 x 400 x 40**

Material: **HDPE**

Load Capacity (tonnes): **12.00**

Weight (kgs): **6.30**

TECHNICAL ADVICE

EASY ORDERING

NEXT DAY DELIVERY
Order by 4pm

BE CONFIDENT. BUY QUALITY.

OUTRIGGER PADS

T +44 (0)1952 671403 **E** sales@outriggerpads.co.uk **outriggerpads.co.uk**