

STABLE SUPPORT FOR LIFTING EQUIPMENT, MOBILE PLANT AND VEHICLES

Our range of high quality outrigger pads and spreader plates provide maximum strength, durability and load distribution with load bearing capacities of up to 300 tonnes.

Engineered to withstand extreme pressure, our tough no-nonsense pads are waterproof and resistant to chemicals, and will adapt to the contours of uneven terrain whilst retaining their shape.



ASK US ABOUT OUR
PRICE MATCH PROMISE

COMPLETE SUPPORT

You can order your outrigger pads by telephone: **01952 671403**

Email: **sales@outriggerpads.co.uk** Online: **outriggerpads.co.uk**

AVAILABILITY AND SHIPPING

We keep a healthy stock of 100+ fastest moving pads and offer next day delivery within the UK and 3-5 days throughout Europe.

PRICING

For our current price information please contact. If you are looking for large quantities, then competitive discounts will be applied.

Our **Multi Mat System** is designed to support high capacity lifting with the flexibility to use in various configurations



PREMIUM PADS

High performing outrigger pads offering incredible strength, rigidity and load distribution - they're built to last! Available in a range of sizes, both square and circular and with the option to personalise.

- Engineered from high performance UHMW Polyethylene
- Resistant to water, oil and chemicals
- Lightweight and easy to handle
- Stored and positioned with minimal effort



SQUARE PADS


Dimensions LxWxH (mm)	Load Capacity (tonnes)	Weight (kgs)	Product Code
400x400x40	12.00	6.30	IP-57072
500x500x40	15.00	10.50	IP-57096
500x500x50	18.00	12.50	IP-57665
500x500x60	25.00	10.00	IP-59005
600x600x40	20.00	14.50	IP-57111
600x600x50	25.00	17.00	IP-57097
600x600x60	30.00	22.00	IP-57666
800x800x40	35.00	25.00	IP-57667
800x800x50	40.00	31.50	IP-57668
800x800x60	45.00	39.00	IP-57669
1000x1000x40	40.00	38.40	IP-59001
1000x1000x50	50.00	48.00	IP-57670
1000x1000x60	70.00	58.00	IP-57671
1000x1000x80	100.00	77.00	IP-57672
1100x1100x40	60.00	46.50	IP-59563
1200x1200x40	68.00	55.50	IP-59002
1200x1200x60	110.00	80.00	IP-57673
1200x1200x80 (4xCH)	120.00	118.00	IP-57674
1200x1200x100 (4xCH)	160.00	146.00	IP-57675

For larger pads see page 10

ROUND PADS

Dimensions DxH (mm)	Load Capacity (tonnes)	Weight (kgs)	Product Code
650x50	25.00	16.50	IP-57715
800x50	35.00	25.00	IP-57679
800x40	25.00	19.30	IP-59534
800x60	40.00	28.50	IP-57680
900x40	30.00	23.00	IP-58696
900x50	45.00	30.00	IP-57681
900x60	50.00	36.50	IP-57682
1000x40	35.00	28.00	IP-58697
1000x50	50.00	37.50	IP-57713
1000x60	60.00	44.50	IP-57683
1000x70	75.00	52.00	IP-57711
1000x80	80.00	60.00	IP-57684
1200x40	50.00	43.50	IP-59516
1200x50	65.00	54.50	IP-59562
1200x60	90.00	64.00	IP-57685
1200x70	110.00	76.00	IP-57712
1200x80	120.00	87.00	IP-57686
1200x80 (CH)	120.00	91.00	IP-57687

All of our outrigger pads are supplied with Rope Handles except for those marked CH (Chain Handles) or SBH (Steel Bar Handles).

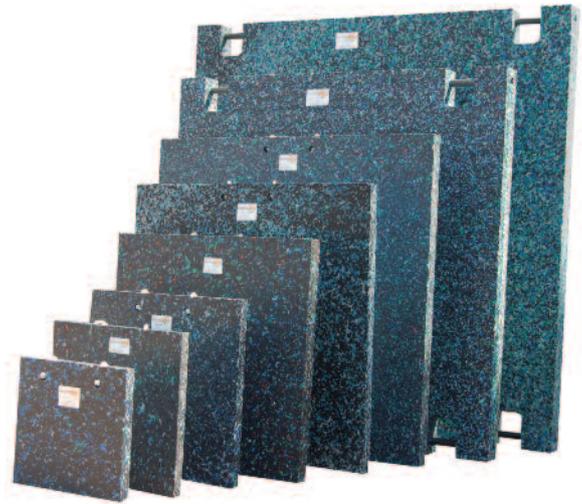

RECESSED PADS

Dimensions LxWxH (mm)	Load Capacity (tonnes)	Weight (kgs)	Product Code	Recess Size (mm)
400x400x40	12.00	6.00	IP-57971	300x10
500x500x40	15.00	10.00	IP-57724	350x8
750x750x80	60.00	52.00	IP-59019	350x8



We are confident that our Premium pad range will stand the test of time which is why each one comes with a Lifetime Warranty. It's very simple: If one of our Premium pads breaks, we'll replace it!

MATERIAL SPECIFICATIONS

Material Specification	Test Result	Test Method
Density	.951g/cm ³	53479
Notched impact strength (15° angle)	mj/mm ² 30 o. Br. mj/mm	53453
Tensile strength	28 N/mm ²	53455
Breaking strength	38 N/mm ²	53455
Modulus of elasticity	1350 N/mm ²	53455
Torsional stiffness +23C	350 N/mm ²	53477
Torsional stiffness -40C	700 N/mm ²	53477
Shore hardness D	64	53505

Visit outriggerpads.co.uk for detailed specifications.



OUTRIGGERPADS OFFER STABLE SUPPORT FOR:

Mobile cranes, crawler cranes, aerial work platforms, truck mounted cranes, mobile crushing equipment, cherry pickers/boom lifts, fire and utilities trucks, knuckle boom crane installers, vehicle mounted platforms, concrete pumps, site cabins, event trailers and leisure vehicles.




MULTI MAT SYSTEM

Designed to support high capacity lifting our Multi Mat System is easily transportable and offers the flexibility to use in various configurations.

- Engineered from high performance UHMW Polyethylene
- Resistant to water, oil and chemicals
- Quick and easy to set-up



MULTI MAT SET-UP

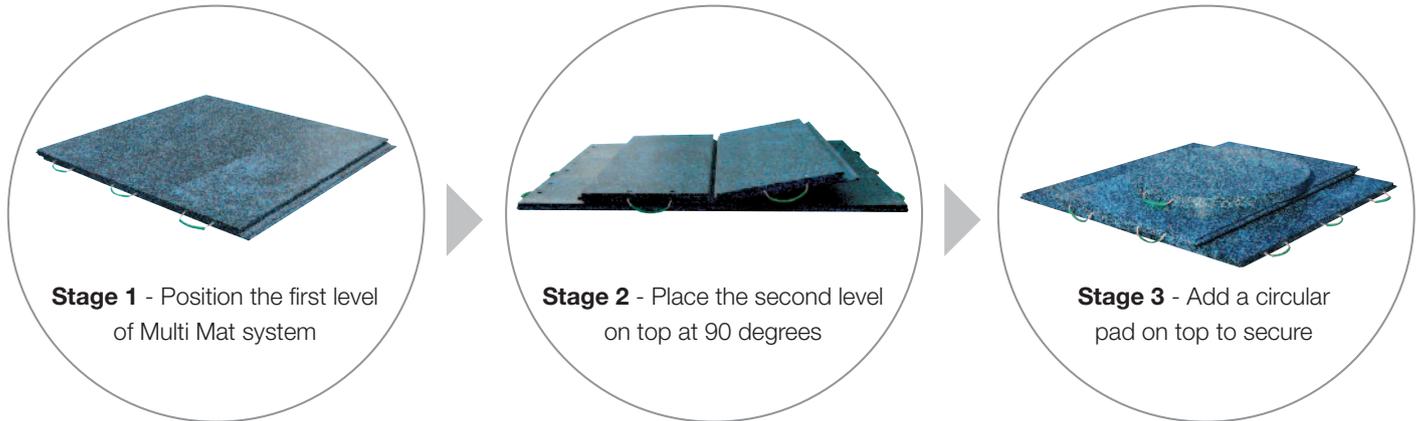

A square pad can also be used to secure the system.


ORIGINAL MULTI MATS

Dimensions LxWxH (mm)	Load Capacity (tonnes)	Weight (kgs)	Product Code
1500x500x50	up to 110.00*	35.00	IP-57709
1800x600x50	up to 160.00**	52.00	IP-57710
1000x60 (to secure)	60.00	45.00	IP-57683
1200x60 (to secure)	90.00	66.40	IP-57685

The Multi Mat system has been tested and approved by Lloyds British.




Subjected to a Finite Element Analysis (FEA).



INTERLOCKING MULTI MATS

Dimensions LxWxH (mm)	Load Capacity (tonnes)	Weight (kgs)	Product Code
1500x565x50	up to 110.00*	41.00	IP-58868
1800x665x50	up to 160.00**	58.00	IP-58806
1000x60 (to secure)	60.00	45.00	IP-57683
1200x60 (to secure)	90.00	66.40	IP-57685


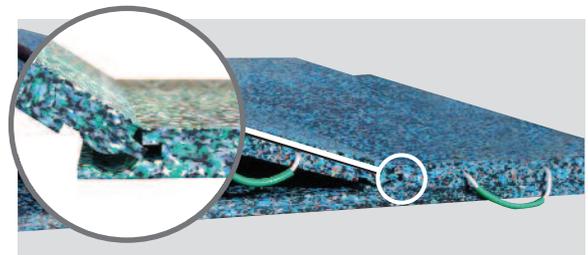


Capacity based on complete Multi Mat System. *3m² Configuration requires x7 mats.
**4.32m² Configuration requires x7 mats.


CONFIGURATION OPTIONS OVERLEAF

CONFIGURATION OPTIONS


1500mm

	ORIGINAL MULTI MAT	INTERLOCKING MULTI MAT
	1.50m² Configuration Requires: IP-57709 x 2 IP-57683 x 1	1.50m² Configuration Requires: IP-58868 x 2 IP-57683 x 1
	2.25m² Configuration Requires: IP-57709 x 5 IP-57683 x 1	2.25m² Configuration Requires: IP-58868 x 5 IP-57683 x 1
	3m² Configuration Requires: IP-57709 x 7 IP-57685 x 1	3m² Configuration Requires: IP-58868 x 7 IP-57685 x 1

1800mm

	ORIGINAL MULTI MAT	INTERLOCKING MULTI MAT
	2.16m² Configuration Requires: IP-57710 x 2 IP-57685 x 1	2.16m² Configuration Requires: IP-58806 x 2 IP-57685 x 1
	3.24m² Configuration Requires: IP-57710 x 5 IP-57685 x 1	3.24m² Configuration Requires: IP-58806 x 5 IP-57685 x 1
	4.32m² Configuration Requires: IP-57710 x 7 IP-57685 x 1	4.32m² Configuration Requires: IP-58806 x 7 IP-57685 x 1

Please note: Capacity based on complete Multi Mat System. These configurations are calculated for the max ground pressure of 5kgs/cm², for normal operational conditions. Our Multi Mat system recommends a round pad to secure, but a square pad is equally suitable.

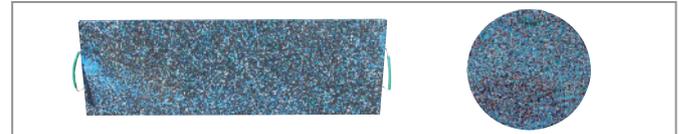

SMARTSTORE

Store your outrigger pads safely with our new **SMARTSTORE**.
 Keep them all in one place and easily move around sites with minimal handling.



ECO LIFT PADS

Tough and stable support with excellent load distribution. A great all rounder for small to medium equipment.

- Engineered from High Molecular Weight Polyethylene (HMWPE)
- Resistant to water, oil and chemicals
- Lightweight and easy to handle



Dimensions LxWxH (mm)	Load Capacity (tonnes)	Weight (kgs)	Product Code	Recess Size
300x300x30	5.00	2.80	IP-72043	-
400x400x40	12.00	6.30	IP-72000	-
500x500x40	15.00	9.90	IP-72001	-
600x600x40	20.00	13.50	IP-72007	-
400x400x50	14.00	7.70	IP-72033	300x8
400x400x40	12.00	6.00	IP-72015	300x8
500x500x40	15.00	9.50	IP-72008	350x8
600x600x40	20.00	13.30	IP-72071	350x8

HI-VIZ PADS

High visibility outrigger pads designed to alert pedestrians to potential trip hazards in public areas.

- Brightly coloured to ensure high visibility
- Engineered from High Molecular Weight Polyethylene (HMWPE)
- Resistant to water, oil and chemicals
- Lightweight and easy to handle



Dimensions LxWxH (mm)	Load Capacity (tonnes)	Weight (kgs)	Product Code	Recess Size
300x300x30	5.00	2.80	IP-72045	-
400x400x40	12.00	6.30	IP-72003	-
400x400x40	12.00	6.14	IP-72042	300x10
400x400x50 (Integrated handles)	14.00	7.50	IP-72017	300x10
500x500x40	15.00	9.90	IP-72002	-
600x600x40	20.00	13.50	IP-72018	-
750x750x40	30.00	21.60	IP-72019	-
1000x60 (Round)	60.00	45.00	IP-72022	-
1200x60 (Round)	90.00	66.40	IP-72029	-


These bright yellow pads are commonly used in public areas such as parking bays, shopping centres, pavements, roadsides and pedestrianised walkways... but can be used in any application where potential trip hazards may occur.

LARGE CRANE MATS

Maximum strength and support for the toughest lifting applications. With load capacities of up to 300 tonnes, our high performing crane pads are engineered to withstand extreme vertical pressure and deliver excellent load distribution.

Dimensions LxWxH (mm)	Load Capacity (tonnes)	Weight (kgs)	Product Code
1500x80 (CH)	160.00	140.00	IP-57726
1500x100 (CH)	180.00	174.00	IP-57688
1500x1500x100 (4xCH)	200.00	224.00	IP-57676
1500x1500x100 (SBH)	200.00	225.00	IP-58542
1800x1800x100 (4xCH)	240.00	319.00	IP-57714
1800x1800x100 (SBH)	240.00	320.00	IP-58541
2000x1000x100 (4xCH)	220.00	200.00	IP-57677
2000x1200x100	230.00	238.40	IP-58488
2000x2000x100	250.00	392.00	IP-59561
3000x2000x100 (4xCH)	300.00	584.00	IP-57678
3000x2000x100 (SBH)	300.00	585.00	IP-58725

CH (Chain Handles) or SBH (Steel Bar Handles).

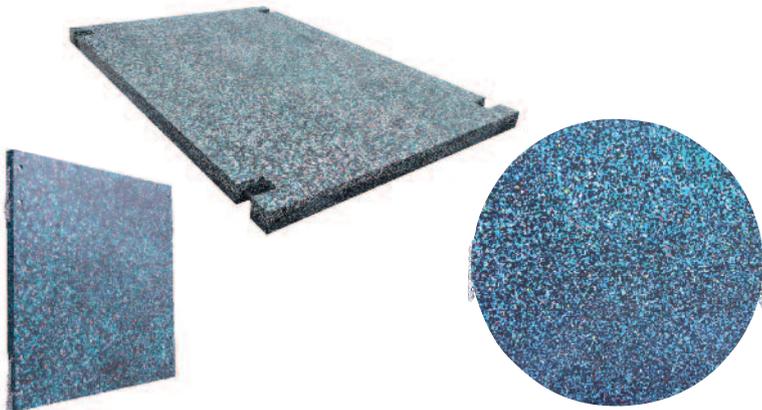



EASY ONLINE ORDERING AT OUTRIGGERPADS.CO.UK

We keep a large stock of our most popular pads so they are ready for next day delivery.*

*UK mainland next working day delivery, 3-5 working days within Europe. Order by 2pm.

HI-PRO PADS


When working on expensive floors, such as marble or oak, you want reassurance that when the work is done you haven't left any scratches or scuffs behind!

With an integrated non-marking rubber base, our Hi-Pro pads offer complete protection without compromising on durability and stability. The top surface is made from High Density Polyethylene (HDPE) complete with a recess for easy positioning of the outrigger foot.

Ideal for use on high value floors, shopping centres, gymnasiums, stately homes and business centres.

- Machined recess to help contain the foot
- Non-marking rubber base
- Lightweight and easy to handle
- Brightly coloured to ensure high visibility



Dimensions LxWxH (mm)	Load Capacity (tonnes)	Weight (kgs)	Product Code	Recess Size
400x400x30	8.00	4.40	IP-72021	300x8
400x400x40	12.00	6.00	IP-72010	300x10
500x500x40	15.00	9.50	IP-72009	350x8
600x600x40	20.00	13.00	IP-72038	350x8
750x750x40	28.00	21.00	IP-72037	350x8

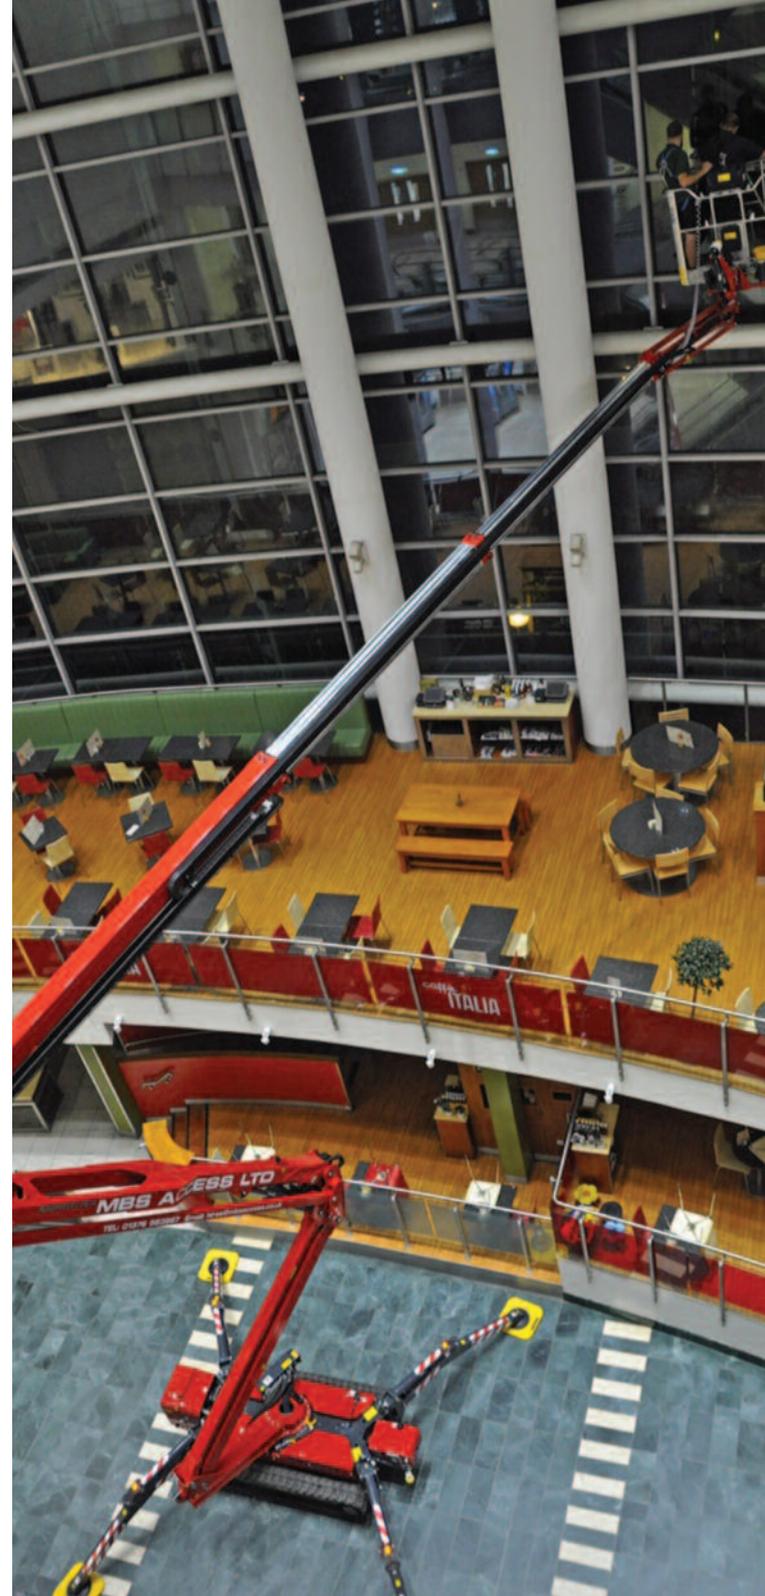

BESPOKE PADS

We can offer custom size outrigger pads to meet your specific application... no pad is too big or too small. Call our team to discuss your requirements.

Dimensions LxWxH (mm)	Load Capacity (tonnes)	Weight (kgs)	Product Code
Niftylift 210 Custom Pad 700x450x80 (with cavity)	16.00	24.20	IP-58635
Niftylift 120 Custom Pad 450x450x60 (with cavity)	13.00	11.00	IP-58592
Manitou MT1440 Custom Booster Pad 500x350x200	30.00	24.50	IP-58842
Omme 2750 Custom Pad 720x400x90 (with cavity)	14.50	18.00	IP-57792
55 Tonne Bobbin	55.00	5.00	IP-58695
1800x900x15 Ground Mat	40.00	25.00	IP-59979
Auger Trapping Pad	-	19.00	IP-58875
Hinowa 450x450x85 Shoe Pad	10.00	11.00	IP-59596

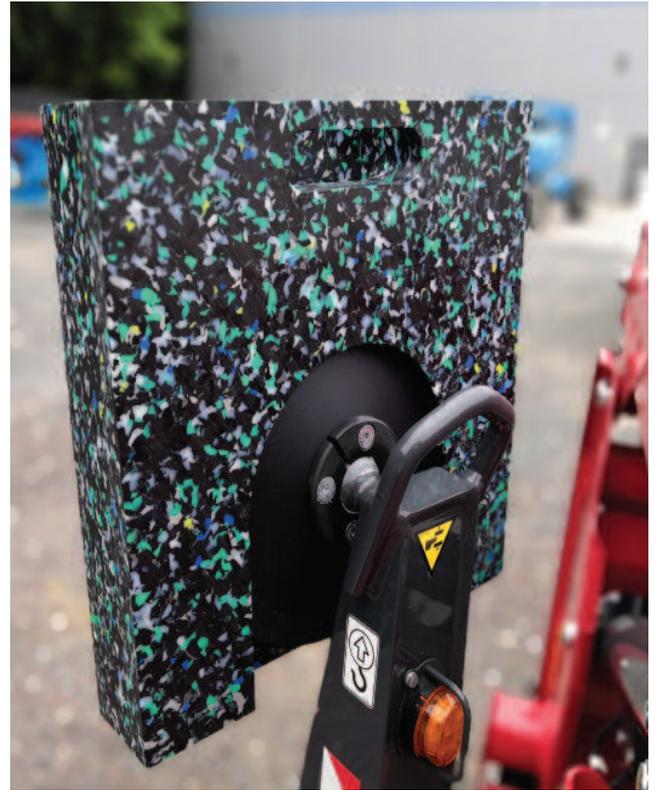

Omme Track-Mount
2750 Custom Pad



Manitou 1440 Telehandler
Custom Booster Pad



55 tonne
Winch
Bobbin



1800x900x15 Ground Mat



Auger Trapping Pad



Niftylift Trailer-Mount 120
Custom Pad



Niftylift Trailer-Mount 210
Custom Pad



Hinowa 450 x 450 x 85
Shoe Pad

GROUND PROTECTION MATS

Highly versatile **GROUND PROTECTION MATS** designed to create temporary roadways or large surface areas for moving heavy machinery and vehicles across soft ground.

Engineered to withstand heavy load transfers, they provide maximum support with minimal disturbance to the ground. Use with our Easy Join connectors for a low-cost and safe temporary surface area.

- Non-slip extruded surface on both sides for superior grip
- Flexible to configure using Easy Join connectors
- Lightweight & easy to handle
- Resistant to water, oil and chemicals
- Manufactured from High Density Polyethylene (HDPE)

Dimensions LxWxH (mm)	Load Capacity (tonnes)	Weight (kgs)	Product Code
1800x900x12.7	40.00	24.00	IP-72032
2880x1440x15	65.00	65.00	IP-72011
Link Bar - 4 way	-	-	IP-72014
Link Bar - 2 way	-	-	IP-72013



Our mats are specified to a size that accommodates the width of most vehicle, crane and equipment chassis. Visit outriggerpads.co.uk for detailed specifications.

STACKABLE PADS

A very versatile solution for a range of applications, our stackable pads provide stable support for event trailers, site containers and similar units. The pads spread the load evenly and are simply stacked on top of each other to achieve the required ground level.

They are also the ideal choice when siting motorhomes and caravans reducing the risk of sinking on soft ground such as grass or uneven terrain such as gravel.

- Engineered from High Molecular Weight Polyethylene (HMWPE)
- Resistant to water, oil and chemicals
- Lightweight, easy to transport, handle and store

Dimensions LxWxH (mm)	Load Capacity (tonnes)	Weight (kgs)	Product Code
200x200x20	1.5	0.66	IP-72064
300x300x25	3.00	1.63	IP-72062



Stackable Jacking Blocks are also available.

PERFECT FOR:

- Containers
- Event Trailers
- Motorhomes
- Caravans



IP-72064



IP-72062



SMARTSTORES

We've expanded our **SMARTSTORE** range to include storage for larger pads as well as the Multi Mat System. Made from heavy duty steel with integral fork-pockets for easy transportation, the **SMARTSTORE** is the safer way to store your pads.



ORIGINAL MULTI MAT SMARTSTORE

Dimensions LxWxH (mm)	Weight (kgs)	Product Code
1570x1145x1100	191	IP-59657
1870x1345x1100	200	IP-59658

INTERLOCKING MULTI MAT SMARTSTORE

Dimensions LxWxH (mm)	Weight (kgs)	Product Code
1570x1275x1100	195	IP-59020
1870x1475x1100	208	IP-59768



SMARTSTORE

Dimensions LxWxH (mm)	Weight (kgs)	Product Code
2010x2010x810	245	IP-60028
1810x1810x810	225	IP-60027
1510x1510x810	195	IP-60026
1210x1210x810	164	IP-60025
1010x1010x810	143	IP-60024

LOAD SUPPORT SYSTEMS

Our new range of Load Support Systems can be used across a range of industries. Our Cribbing and Jacking Blocks are designed to be an alternative to blocks of wood used in workshops. Made out of High Density Polyethylene (HDPE), they will withstand heavy loads and can be built up to a desired height when using multiple blocks.

CRIBBING BLOCKS


Dimensions:	L 600mm x W 150mm x H 150mm
-------------	-----------------------------

Load Capacity:	10.00 tonne
----------------	-------------

Weight:	13kg
---------	------

Product Code:	IP-72070
---------------	----------

Other sizes available.

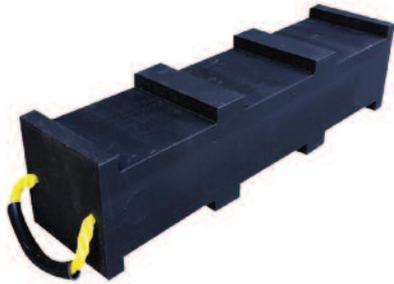

JACKING BLOCKS

Dimensions:	L 300mm x W 300mm x H 300mm
-------------	-----------------------------

Load Capacity:	20.00 tonne
----------------	-------------

Weight:	32kg
---------	------

Product Code:	IP-72065
---------------	----------

Stackable Jacking Blocks also available.



OSCILLATING AXLE TESTING RAMP

Our Oscillating Axle Testing Ramps are engineered from high performance UHMW Polyethylene and can hold loads of up to 50 tonnes per pair.


Dimensions:	L 860mm x W 600mm x H 155mm
-------------	-----------------------------

Load Capacity:	50 tonne per pair
----------------	-------------------

Weight:	64kg per pair
---------	---------------

Product Code:	IP-72067
---------------	----------

Heavy Duty Loading Ramps also available.

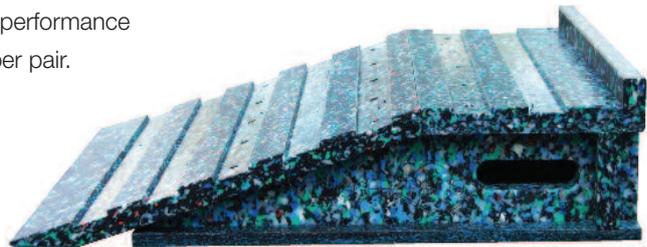

ACCESSORIES

STOWAGE HOLSTERS

We offer fully galvanised stowage holsters which can be bolted to a crane, platform or vehicle for safe and secure stowage of your outrigger pads.

Each stowage holster has space to store two pads and is supplied complete with mounting brackets.



Dimensions LxWxH (mm)	Weight (kgs)	Product Code
400x400x130	7.00	IP-57698
500x500x130	7.50	IP-57699
600x600x130	10.00	IP-57697
800x800x130	15.00	IP-58723
1000x1000x170	23.30	IP-58877


ID PLATES AND ENGRAVING

Personalised ID stamping or engraving can help protect your investment by acting as a theft deterrent or identifier should they be misplaced. We can professionally brand your outrigger pads with your company name, logo and contact details - just let us know if you're interested, and we can provide a quote!



NON-SLIP SURFACES

We are aware that from time to time our customers may be operating on surfaces where extra grip is necessary. As a result, we can (on request) produce our pads with several different types of non-slip surfaces. Please contact us via email or telephone for further details.

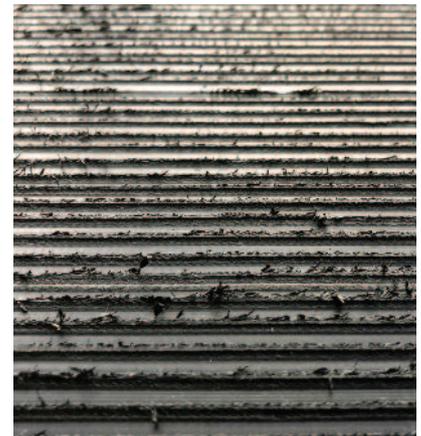

WHY BUY FROM US?



Tough, stable support for high capacity lifting. They're built to last. Tested by Lloyds British.



We won't keep you waiting! Our pads are held in stock ready to ship direct to your door within 24 hours.



Not sure what you need? Our team are on hand to offer expert technical advice and support.



Order online 24/7 or use our helpful outrigger pad calculator to help you determine the right size needed.

THE OUTRIGGER PAD CALCULATOR HELPING YOU SIZE YOUR OUTRIGGER PADS



The outrigger pad calculator is a handy tool to ensure you identify the correct size outrigger pads and spreader plates for the job. In just a few simple steps, the Pad Calculator helps you to properly assess the ground conditions by accounting for factors such as ground pressure and maximum load per outrigger. It eliminates any hassle or risk in just a few clicks!

It really is as easy as **1-2-3!** Visit our website to give it a go today!



HELPING YOU WORK SAFER AND SMARTER



DISTRIBUTOR



Outriggerpads

Shropshire House
Hortonwood 1
Telford
Shropshire
TF1 7GN

T +44 (0) 1952 671403 **F** +44 (0) 1952 671471 **E** sales@outriggerpads.co.uk **outriggerpads.co.uk**