




HI-VIZ (IP-72003) OUTRIGGER PAD

These bright yellow pads are commonly used in public areas such as, parking bays, shopping centres, pavements, roadsides and pedestrianised walkways... but can be used in any application where potential trip hazards may occur.

- Alerts pedestrians to potential trip hazards
- Provides greater visibility in poor light or muddy ground conditions
- Tough and stable support for outrigger legs
- Engineered from High Density Polyethylene (HDPE)
- Resistant to water, oil and chemicals
- Lightweight and easy to handle

SUITABLE FOR:

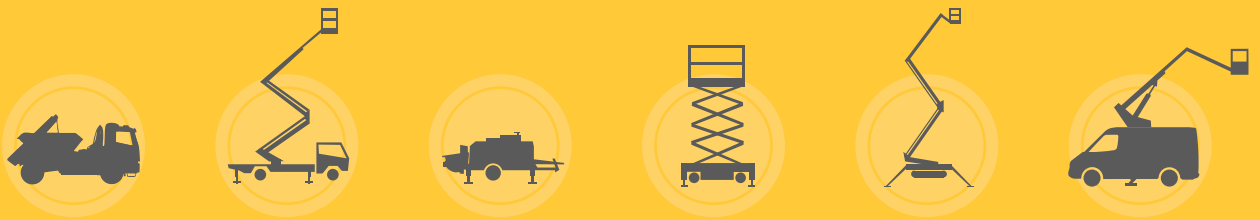

MATERIAL SPECIFICATION

PROPERTIES	UNIT	TEST METHOD	ISO-LEN 500
Density	g/cm3	ISO1183-1	0.95-0.98
YieldMPa	ASTM D-638	25	
Ultimate strength	MPa	ASTM D-638	45
Tensile strength	Psi	ASTM D-638	5900
Tensile modulus of elasticity	Psi	ASTM D-638	116500
Breaking elongation	%	ISO527	>50
Impact strength	MJ/mm2	ISO179	No breaking
Shore hardness	Shore D	ISO868	64-67
Abrasion	Steel=100	ISO15527	83
Melting Point	°C	ASTM D-3417	138
Coefficient of thermal expansion	°C	ASTM D-696	0.0002
Friction coefficient (Static state)	Unit less	ASTM D-1894	0.11

The data mentioned in this brochure are average values ascertained by current statistical returns and tests, but we cannot accept any responsibility for their accuracy.

Product Code: **IP-72003**

Dimensions (mm): **400 x 400 x 40**

Material: **HDPE**

Load Capacity (tonnes): **12.00**

Weight (kg): **6.30**



TECHNICAL
ADVICE



EASY
ORDERING



NEXT DAY
DELIVERY
Order by 4pm

BE CONFIDENT. BUY QUALITY.

